

# Recessed Pro-Power Kit with Duplex

## Receptacle and Straight Blade Inlet

DataComm Electronics' Recessed Pro-Power Kit with Duplex Receptacle and Straight Blade Inlet is used to install power and low voltage cables behind your HDTV, your amplifier or other audio/video devices. This power relocation kit allows you to pass low voltage cables and power through the wall, creating a professional, clean look for every home theater.

### Features

- Works with the industry's the thinnest mounts and HDTV's.
  - 15 Amp/125 Volt tamper resistant duplex receptacle allows power to be installed behind an HDTV or other similar applications.
  - Conceal multiple low voltage cables behind your HDTV.
  - Metal mounting wings are attached to the media plate and fasten tightly against the back of the wall. No low voltage mounting plate necessary.
  - Female end of extension cord is recessed completely into the wall when plugged into the Straight Blade Inlet.
  - Male end of extension cord has a 360° rotating flat head for easy access to any outlet.
- Parts Included:
    - Recessed Low Voltage Mid-Size Plate with Duplex Receptacle
    - Recessed Low Voltage Cable Plate with Straight Blade Inlet
    - 6 Ft. 16/2 with Ground Cord Set with 360° Rotating Flat Head
    - Two (2) Electrical Outlet Boxes
    - 15 Amp/125 Volt Tamper Resistant Duplex Receptacle

# Recessed Pro-Power Kit with Duplex


## Surge Suppressor and Straight Blade Inlet

DataComm Electronics' Recessed Pro-Power Kit with Duplex Surge Suppressor and Straight Blade Inlet is used to install power and low voltage cables behind your HDTV, your amplifier or other audio/video devices. This power relocation kit allows you to pass low voltage cables and power with surge protection through the wall, creating a professional, clean look for every home theater.

### Features

- Works with the industry's thinnest mounts and HDTV's
  - 15 Amp/125 Volt duplex surge suppressor allows power to be installed behind an HDTV or other similar applications with surge protection:
    - Maximum surge current - 15,00 amps
    - Clamping response time - 1 nanosecond
    - Hot/Neutral, Hot/Ground, Neutral/Ground
    - Total maximum surge dissipation
  - Conceal multiple low voltage cables behind your HDTV.
  - Metal mounting wings are attached to the media plate and fasten tightly against the back of the wall. No low voltage mounting plate necessary.
  - Female end of extension cord is recessed completely into the wall when plugged into the Straight Blade Inlet.
- Male end of extension cord has a 360° rotating flat head for easy access to any outlet.
  - Parts Included:
    - Recessed Low Voltage Mid-Size Plate with Duplex Surge Suppressor
    - Recessed Low Voltage Cable Plate with Straight Blade Inlet
    - 6 Ft. 16/2 with Ground Cord Set with 360° Rotating Flat Head
    - Two (2) Electrical Outlet Boxes
    - 15 Amp/125 Volt Duplex Surge Suppressor

### Installation Diagram




#### 45-0024-WH

Recessed Pro Power Kit with Duplex Receptacle & Straight Blade Inlet (top plate)

#### 45-0028-WH

Recessed Pro Power Kit with Duplex Surge & Straight Blade Inlet (top plate)

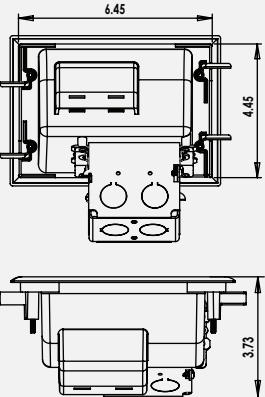

Part Number	Description
45-0024-WH	Recessed Pro-Power Kit with Duplex Receptacle and Straight Blade Inlet, White
45-0028-WH	Recessed Pro-Power Kit with Duplex Surge Suppressor and Straight Blade Inlet, White

(Part #45-0028-WH is not pictured in this sheet. Both products are the same except for the type of receptacle installed; refer to the product features section (left) for receptacle specifications).

RoHS Compliant.  
This product is patent  
protected by  
U.S. Patent numbers:  
D553475, D554475,  
and 7390964.



**DATA COMM**  
ELECTRONICS  
Sales Orders@datacommelectronics.com  
Support Info@datacommelectronics.com  
Office 770.662.8205